



1900 WEST SEWER UPGRADE PROJECT


JULY 2025

The Central Weber Sewer Improvement District will begin sewer line upgrades in late July along 1900 W. in West Haven/Ogden between approximately 1700 S. (Comfort Solutions) and Midland Dr. The project will rehabilitate a section of existing pipe on the southern end and remove and replace existing sewer manholes and pipes and install upsized pipes in the remainder to meet current and future wastewater/sewer collection needs. Project completion is expected by fall 2026.

TENTATIVE SCHEDULE

**Schedules are subject to change due to weather conditions, equipment/supply issues and other unforeseen circumstances.*

- **Week of July 27:** Mobilize equipment
- **Week of July 27:** Set up traffic control (restripe road and shift traffic to east side between 2800 S. and Midland Dr.)
- **Week of August 4:** Sawcut western shoulder (2800 S. to Midland Dr.); asphalt will be removed as crews reach areas
- **Week of August 4:** Set up sewer bypass in work zone
- **Week of August 4 - late August:** Sewer main installation (3150 S. to Midland Dr.); open trenching
- **August 13 - August 20:** Bore under Union Pacific Railroad (UPRR at Midland Dr.)
- **Late August - Early September:** Reline pipes (3200 S. to 2900 S.), trenchless
- **September - October:** Sewer main installation (1700 S. – 2300 S.), open trenching
- **October:** Bore under Utah Central Railroad (UCRR at Wilson Ln.)
- **October:** Bore under Hooper Canal at 1800 S.
- **November:** Bore under Wilson and Layton Canals at 2200 S.
- **December 2025 – March 2026:** Schedule to be determined pending weather conditions
- **April 2026 – August 2026:** Sewer main installation (2300 S. to 2900 S.), open trenching
- **October 2026:** Project completion

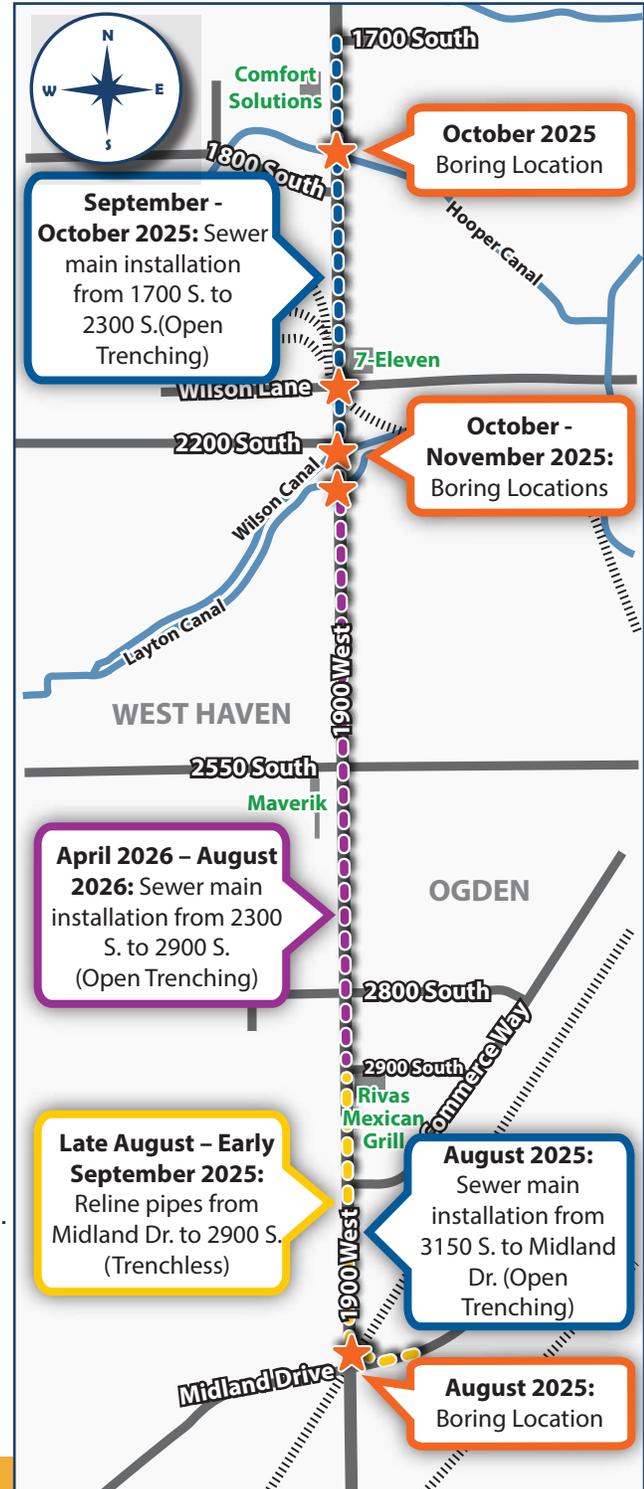

For more information, please reach out to the project public involvement team at:

1900westsewer@jub.com

385-493-0812

Construction updates will be posted to: centralweberut.gov/general-information

Email 1900westsewer@jub.com to sign-up for email updates. Fliers will be delivered to residents and businesses for location-specific work and impacts.



1900 WEST SEWER UPGRADE PROJECT

JULY 2025

CONSTRUCTION IMPACTS

- Traffic will be shifted to the east side of 1900 West, with a goal to maintain two lanes of traffic in each direction in work zones. The center turn lane will be maintained where possible.
- Drivers should expect intermittent through and turn lane closures, flagging operations and temporary side-street closures with advance notice. Weekend and night work will be scheduled for major cross-street closures.
- Open trenching for sewer mainline work will be on the **west side of 1900 West** in the existing roadway shoulder between 1700 South and 2900 South; 3150 South to Midland Drive; and Midland Drive between 1900 West and 3300 South.
- Beginning on the north and moving southward, sewer main installation will be phased in approximately 500-foot sections.
- Business and residential access will be maintained. With advance notice, properties on the **west side of 1900 West** should expect open trenching through driveways and temporary closures. Properties with multiple driveway accesses will have them closed one at a time.
- A temporary sewer bypass pipe will be in place in work zones.
- Businesses on **both sides of 1900 West** (1700 South - 2900 South) should expect up to half-day sewer service interruptions with advance notice for connection to the new sewer main. This work will be scheduled following completion of mainline installation in each section.
- Crews will rehabilitate the existing sewer main between Midland Drive and 2900 South (Rivas Mexican Grill) which will not require open trenching.
- Underground boring operations will be used to cross under railroad lines and canals.
- Crews plan to work Monday through Friday from 7:30 a.m. – 5 p.m. with night and weekend work scheduled as needed.
- Motorists are advised to reduce speeds and watch for lane shifts in work zones.
- Utility service interruptions (other than sewer) are not planned with this project, however, advance notice will be provided if they become necessary.

For more information, please reach out to the project public involvement team at:

 1900westsewer@jub.com

 385-493-0812

Construction updates will be posted to:
centralweberut.gov/general-information

Email 1900westsewer@jub.com to sign-up for email updates. Fliers will be delivered to residents and businesses for location-specific work and impacts.